

PMMA Lenses



THE USIOL ADVANTAGE

Polymethyl methacrylate (PMMA)


Available in diopters
0.0D - 30.0D (0.5D increments
from 8.0D - 30.0D)

UV-A absorbing

Computerized lathe-cut optics

Ethylene oxide dry gas sterilized

ISO 13485

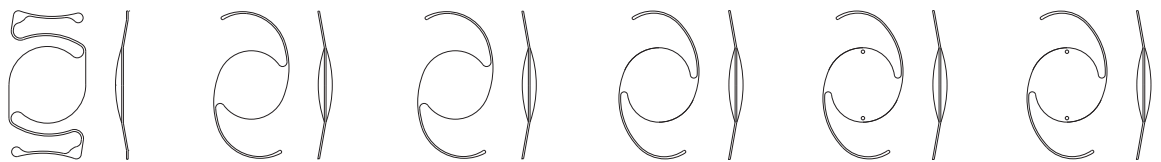

MODEL	601 UV	618 UV	628 UV	630 UV	635 UV2	640 UV2
CHAMBER	Anterior	Posterior	Posterior	Posterior	Posterior	Posterior
OPTIC STYLE	Plano-convex	Biconvex	Biconvex	Biconvex	Biconvex	Biconvex
OPTIC SIZE	6.0mm	5.0mm	5.5mm	6.0mm	6.0mm	6.5mm
DIAMETRAL	12.5mm	12.0mm	12.0mm	13.0mm	12.5mm	13.0mm
HAPTIC STYLE	—	C	C	C	C	C
ANGULATION	0.5mm vault depth	10°	10°	10°	10°	10°
POSITION HOLES	0	0	0	0	2	2
"A" CONSTANT	115.3	118.2	118.2	118.4	118.4	118.5
ANTERIOR CHAMBER DEPTH	3.3mm	4.6mm	4.7mm	4.9mm	4.9mm	5.0mm

SHARING YOUR VISION

